

(19) World Intellectual Property
Organization
International Bureau



10/544152
Rec'd PCT/PTO 01 AUG 2005



(43) International Publication Date
19 August 2004 (19.08.2004)

PCT

(10) International Publication Number
WO 2004/069540 A1

(51) International Patent Classification⁷: B41F 13/02

(21) International Application Number:
PCT/KR2004/000085

(22) International Filing Date: 19 January 2004 (19.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2003-0007333 6 February 2003 (06.02.2003) KR

(71) Applicant and

(72) Inventor: CHO Chung [KR/KR]; 3094, Seongnam-dong,
Jungwon-gu, Seongnam-si, Gyeonggi-do 426-826 (KR).

(74) Agent: YANG, Gun Sik; 509, Junggok B/D, 1705, Secho-
dong, Secho-gu, Seoul 137-070 (KR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,


AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: ROTARY PRESS

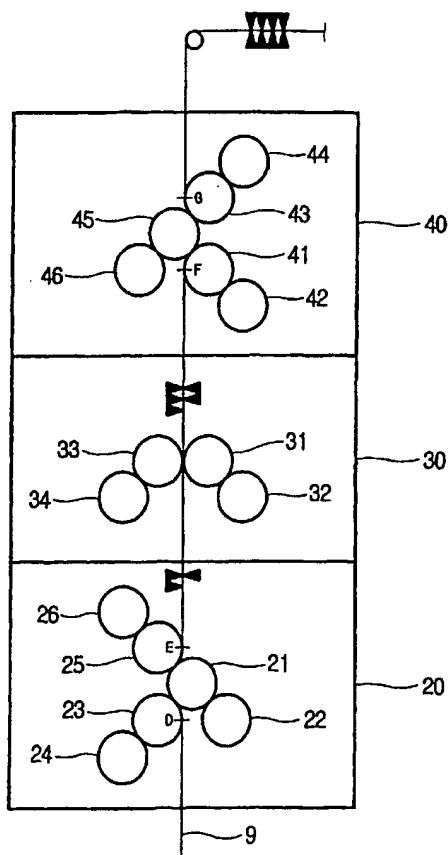

(57) Abstract: A rotary press is provided. In the rotary press, tension of paper passing through printing units is always maintained to be constant, and position of a printing pin of each printing unit is consistently maintained to thus prevent a pin secession phenomenon of a printed image from occurring, in such a manner that an output image of the rotary press becomes clear. Also, it is easy to change the structure of a one-side color printing rotary press into that of a double-side color printing rotary press. As a result, the rotary press can be used widely on a general purpose.

WO 2004/069540 A1